


PRESSURE GAUGES NEEDLE VALVES WITHOUT CHECKING FLANGE

Brass SS-EN CW 614N

DN	RSK.No
8	462 20 11
10	462 20 15
15	462 20 23

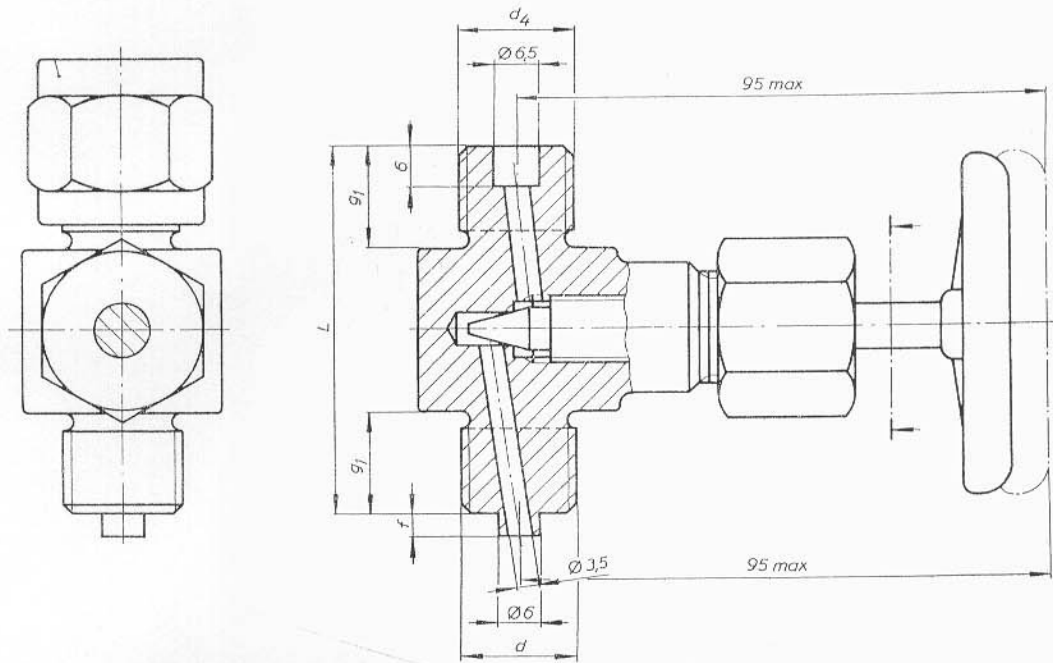

DN	Thread		g1	f	b min	L
	d	d4				
8	R1/4-B	R1/4-B Left	13	3	31	50
10	R3/8-B	R3/8-B Left	15	3	31	54
15	R1/2-B	R1/2-B Left	20	5	34	64

Working pressure Max 100 Bar

Working temperature Max 185 C

The valve can be supplied with locked boxnut.

Packing: Graphite.

The valve are supplied with handwheel of steelplate

Rubens
VERKSTAD AB

BOX 103, S-280 60 BROBY

PHONE +46 44 401 78 • FAX +46 44 408 51