

RUBENs

Pressure Gauge Valve PN400 without checking flange

The valve are of forged steel construction

MATERIAL SPECIFICATION:

Stainless steel

Body: W.nr 1.4104

Stem: W.nr 1.4021

Packing: Molded graphite

Handwheel: Aluminium, Red lacquered

RSK NO	DN	G
462 30 13	10	3/8
462 30 21	15	1/2

Stainless steel

Body: W.nr 1.4404

Stem: W.nr 1.4460


Packing: Molded graphite

Handwheel: Aluminium, Red lacquered

RSK NO	DN	G
462 30 25	10	3/8
462 30 26	15	1/2



Pressure	400	160	125	20	bar
Temp	20	125	200	300	C°

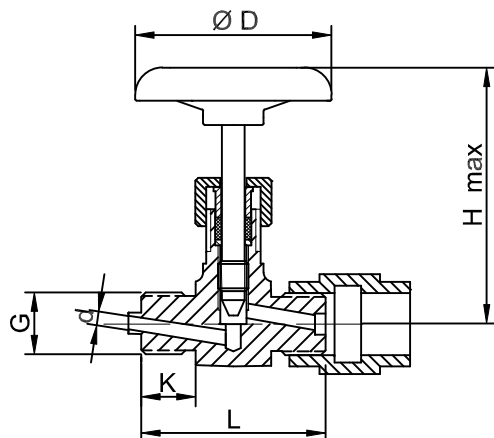

Size.		K	d	L	D	M max	Weight kg
DN	G						
10	3/8	15	3,5	54	65	85	0,34
15	1/2	20	3,5	64	65	85	0,40

- All valves are tested before delivery.
- The valve can be supplied with: Locked boxnut, Handle of 1.4404.
- Area of use: as shut-off and control valve where high pressures and temperatures occur.
The valves are intended for water, steam, oils and most common acids and alkalis.
- Certificate: Material certificate DIN50049. 2.2 (specified when ordering)
- The products fall under AFS2016:1 Paragraph 8 and do not need to be CE marked.

Rubens
VERKSTAD AB

Njuravägen 11, SE-289 43 Broby
Tel. +46 44 40178
Email. info@rubensverkstad.se
www.rubensverkstad.se